


INSTALLATION INSTRUCTIONS

Xtract™ Drum Adapter Kit

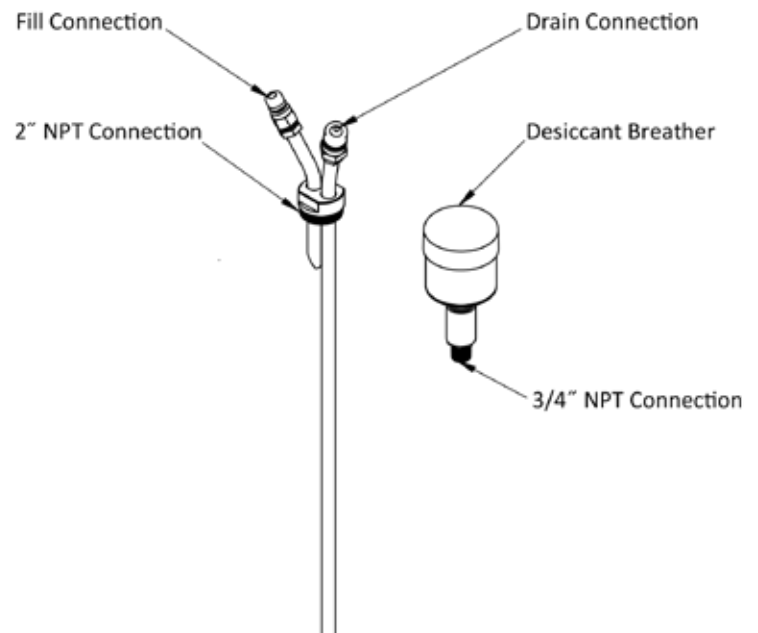

Before Installation

1. This adapter is intended for use on a 55-gallon drum but can be modified to fit other standard sizes. It requires that drum has 2" NPT and 3/4" NPT connections.
2. Verify that storage drum is upright and that there is clearance of at least 11 inches above drum.

Included in this Kit

- Drum breather adapter
- Drain and fill tube with quick-disconnect couplings
- LEX-17-T Xclude Standard Breather Adapter
- Desiccant breather



INSTALLATION INSTRUCTIONS

Installing Adapter to Reservoir

1. Read and follow "Before Installation" guide at beginning of this instruction sheet.
2. Thread drum adapter into 2" NPT port on top surface of drum.
3. Insert fill and drain tubes into two 3/4" holes in drum adapter.
4. Thread LEX-17-T breather adapter into 3/4" NPT port on top surface of drum.
5. Remove red plugs from provided desiccant breather as indicated in breather installation procedures. Failure to do this will cause damage to system.
6. Thread desiccant breather into LEX-17-T breather adapter. Hand-tighten only.

Additional Support

Lubrication Engineers may be able to provide special fittings and fasteners that will aid in installation of this product. Please contact Customer Service at 800-537-7683 with questions regarding installation or servicing of this product.

LE's Full Line of Xtract Filtration Adapter Kits



Gearbox Adapter



Hydraulic Adapter



Tote Adapter



Drum Adapter